





al Sufit Prilag®

WRD3K410



PINNING

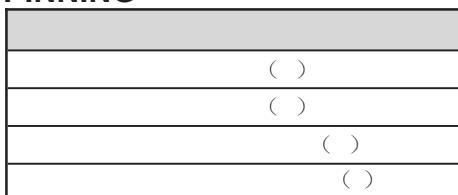

Features


Benefits

Maximum Ratings and Electrical characteristics


Parameter		WRD3K410	Units
()			

WRD3K410


RATINGS AND CHARACTERISTICS CURVES

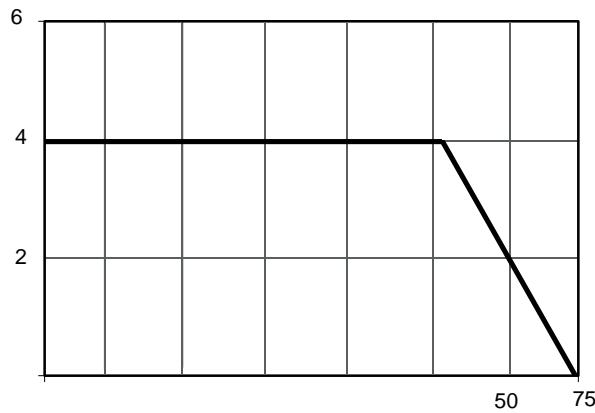

Current Derating, Case

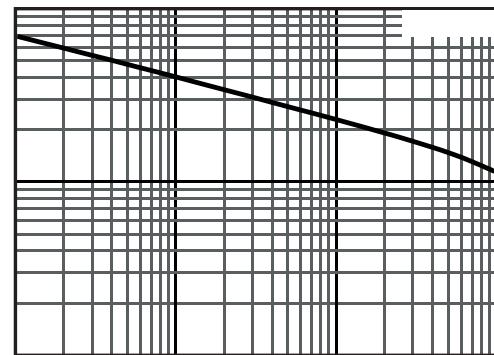

Typical Junction Capacitance

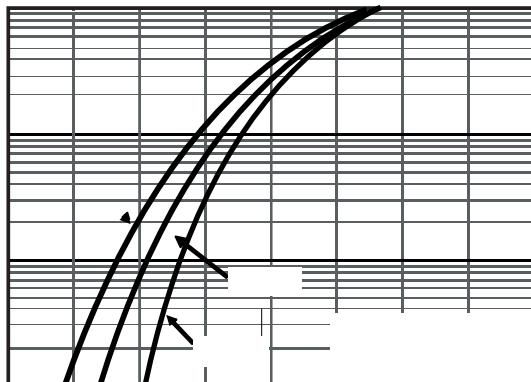


Typical Forward Voltage

50

Typical Reverse Current

PACKAGE OUTLINE DIMENSIONS

D3K

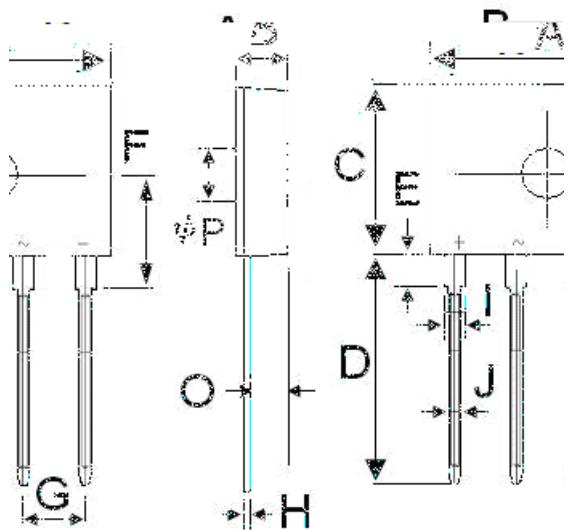

D3K		
Dim.	Min.	Max.
A	14.2	14.7
B	3.30	3.60
C	10.2	10.6
D	13.8	14.4
E	1.8	2.2
F	6.65	7.25
G	3.71	3.91
H	0.3	0.55
I	1.22	1.42
J	0.76	0.86
O	1.8	2.4
P	3.0Φ	3.4Φ

All Dimensions in millimeter

